


# MINIATURE CIRCUIT BREAKERS (MCB)

## SAFE

Rated short-circuit breaking capacity : 4.5kA

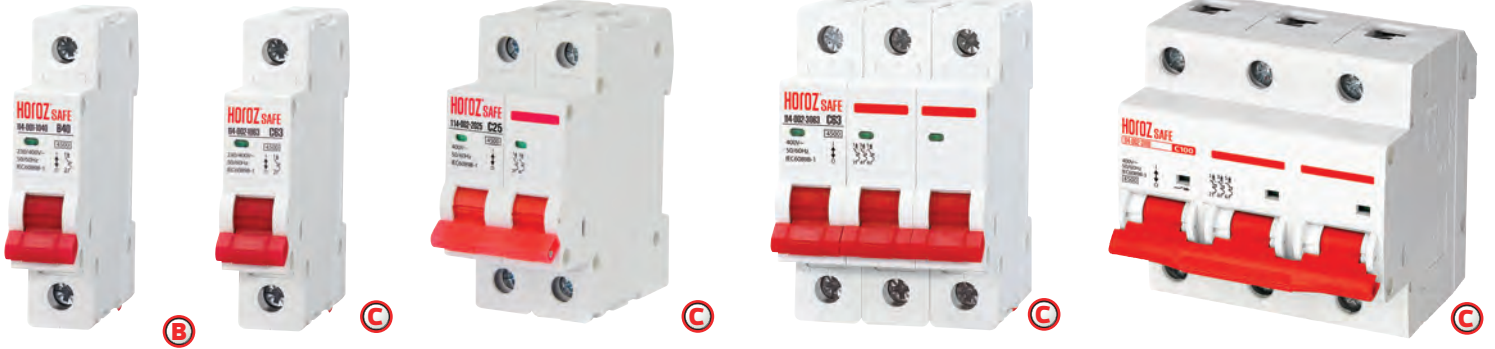


	114-001-1006	114-001-1010	114-001-1016	114-001-1020	114-001-1025	114-001-1032	114-001-1040	114-002-1002	114-002-1004	114-002-1050	114-002-1063
Rated Current	6A	10A	16A	20A	25A	32A	40A	2A	4A	50A	63A
Poles	1	1	1	1	1	1	1	1	1	1	1
Instantaneous tripping type	B	B	B	B	B	B	B	C	C	C	C
Rated working voltage	230V/400V	230V/400V	230V/400V	230V/400V	230V/400V	230V/400V	230V/400V	230V/400V	230V/400V	230V/400V	230V/400V
Width	17.5 mm	17.5 mm	17.5 mm	17.5 mm	17.5 mm	17.5 mm	17.5 mm	17.5 mm	17.5 mm	17.5 mm	17.5 mm

	114-002-2006	114-002-2010	114-002-2016	114-002-2020	114-002-2025	114-002-2032	114-002-2040	114-002-2050	114-002-2063
Rated Current	6A	10A	16A	20A	25A	32A	40A	50A	63A
Poles	2	2	2	2	2	2	2	2	2
Instantaneous tripping type	C	C	C	C	C	C	C	C	C
Rated working voltage	400V	400V	400V	400V	400V	400V	400V	400V	400V
Width	35 mm	35 mm	35 mm	35 mm	35 mm	35 mm	35 mm	35 mm	35 mm

	114-002-3006	114-002-3010	114-002-3016	114-002-3020	114-002-3025	114-002-3032	114-002-3040	114-002-3050	114-002-3063	114-002-3080	114-002-3100
Rated Current	6A	10A	16A	20A	25A	32A	40A	50A	63A	80A	100A
Poles	3	3	3	3	3	3	3	3	3	3	3
Instantaneous tripping type	C	C	C	C	C	C	C	C	C	C	C
Rated working voltage	400V	400V	400V	400V	400V	400V	400V	400V	400V	400V	400V
Width	52.5 mm	52.5 mm	52.5 mm	52.5 mm	52.5 mm	52.5 mm	52.5 mm	52.5 mm	52.5 mm	52.5 mm	52.5 mm

### Technical Drawing



### Applications

- Industrial areas
- Commercial uses

